

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 33 TOWNSHIP 15 RANGE 4

DATE: 6-16-03

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison-no cap

METHOD OF ESTABLISHMENT: County: 9-23-98



IN. S.P.C. E ZONE NAD '83

NAME: 15043305

N: 494484.4036(m)

E: 63526.1920(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

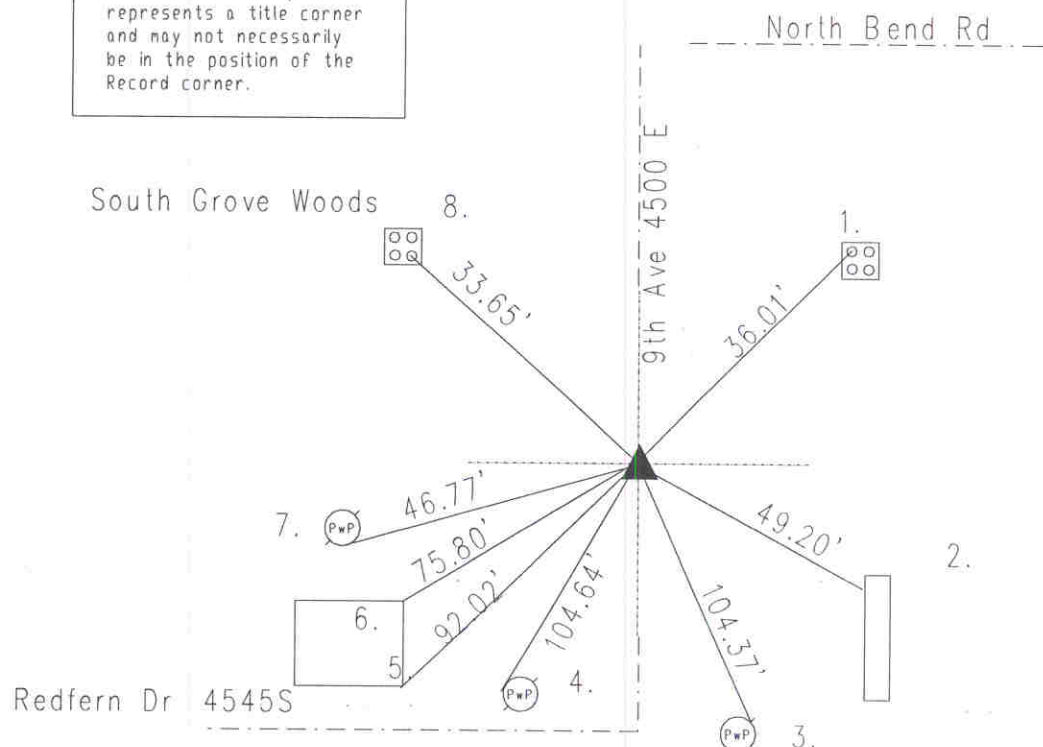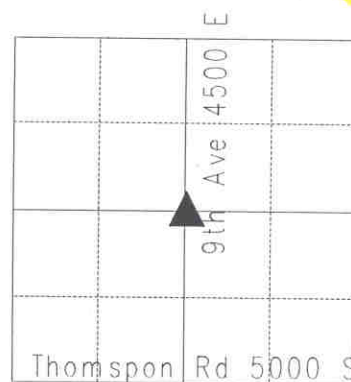

Survey by Hosbrook 6-16-1850 called no stone but witness: 16" oak stump N 47 1/2 W 18 links, 18" oak stump S 76 E 128 links per Perry Township Legal Book pg. 13. MCSO 8-6-47 called stone. GWS 2-20-62 called stone near surface. Wilcoxon 10-21-75 called brass plug in steel box. Gries 10-20-88 called same. Greene 2-1-91 called same. Harrison set 7-23-96 per Kiste. Re-tied 9-23-98. Re-tied 6-16-03 by Wilcoxon.

15043305

REF.	DISTANCE	DESCRIPTION
1.	36.01'	Cut 'x' NW-bolt of sign base
2.	49.20'	Cut 'x' NW curb inlet
3.	104.37'	PK nail NE PwP#128-703 A 8"up
4.	104.64'	PK nail W PwP#833-1066 24"up
5.	92.02'	SE notch in leg of high tension tower
6.	75.80'	NE "
7.	46.77'	Railroad spike SE PwP#833-1065 12"up
8.	33.65'	Cut 'x' SE-bolt of aluminum pole base